
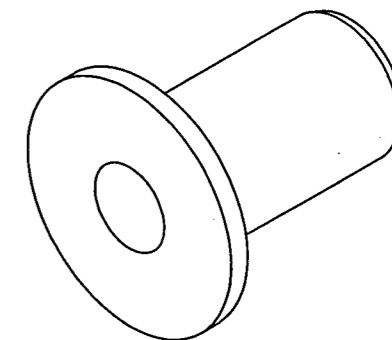


D5446-1 BUSHING

Ø0.257
THRU

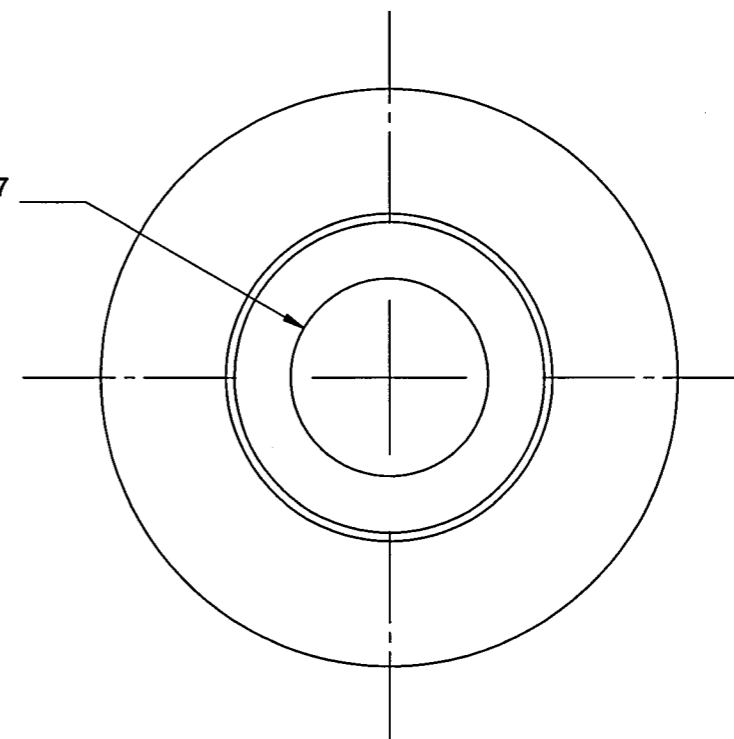

- NOTES:
- 1) MATERIAL: 17-4PH SS ROUND BAR PER AMS 5643 (REF DART SPEC M17-4-R) HEAT TREAT TO H1150 CONDITION
MINIMUM ULTIMATE TENSILE STRENGTH = 125 KSI
MINIMUM YIELD TENSILE STRENGTH = 100 KSI
 - 2) FINISH: NONE
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044
 - 7) WEIGHT: 0.03 lbs

RELEASED
2017-10-31
ECN 17-728

APPROVED

| | | | | |
|------------|-------------|---|----|--------------|
| A | NEW ISSUE | | NO | 17.02.23 |
| REV. | DESCRIPTION | | BY | DATE |
| DESIGN | NO | DART AEROSPACE USA, INC. EUGENE, OR | | |
| DRAWN | NO | | | |
| CHECKED | AJS | DRAWING NO. D5446 | | REV. A |
| MFG. APPR. | JFS | | | SHEET 1 OF 1 |
| APPROVED | WM | TITLE BUSHING | | SCALE |
| DE APPR. | DS | | | NTS |
| DATE | 17.02.23 | COPYRIGHT © 2017 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC. | | |